



BOS-A

BOS-A



Intelligent Control

Over-discharge/charge/current and temp protection



Superior Output

Support up to 160A current output



Flexible Expansion

Support 7~21 packs in series
Inverter 50~100kW, Battery 54~161kWh



10-Year Warranty

Safest LFP battery&Intelligent BMS



3U Rack Design

Connectable to two inverter DC interfaces



Battery Protection

Auto-managed charge/discharge&Cell voltage balancing

Small-Scale C&I Energy Storage Solution



Model	BOS-A50	BOS-A60	BOS-A65	BOS-A75	BOS-A80	BOS-A90	BOS-A95	BOS-A100
-------	---------	---------	---------	---------	---------	---------	---------	----------

Main Parameters

Cell Chemistry	LiFePO4							
Module Energy (kWh)	7.68							
Module Nominal Voltage (V)	38.4							
Module Capacity (Ah)	200							
Module Dimension (W × D × H, mm)	601.5 × 520 × 135							
Module Weight Approximate (kg)	70							
Battery Module Qty In Series (Optional)	7	8	9	10	11	12	13	14
System Nominal Voltage (V)	268.8	307.2	345.6	384	422.4	460.8	499.2	537.6
System Operating Voltage (V)	235.2~306.6	268.8~350.4	302.4~394.2	336~438	369.6~481.8	403.2~525.6	436.8~569.4	470.4~613.2
System Energy (kWh)	53.76	61.44	69.12	76.8	84.48	92.16	99.84	107.52
System Usable Energy (kWh) ^[1]	48.38	55.29	62.2	69.12	76.03	82.94	89.85	96.76
Max Continuous Discharge Rate(kW)	43	49.15	55.29	61.44	67.58	73.72	79.87	86.01
Charge/Discharge Current(A) ^[2]	Recommend		100					
	Max.		160					

Other Parameter

Working Temperature (°C)	Charge : 0 ~ 55 / Discharge : -20 ~ 55							
Status Indicator	Yellow : Battery High Voltage Power On Red : Battery System Alarm							
Communication Port	CAN2.0							
Humidity	5% ~ 85%RH							
Altitude	≤3000m							
IP Rating of Enclosure	IP20							
Dimension (W × D × H, mm)	610 x 610 x 1600	610 x 610 x 1600	610 x 610 x 1900	610 x 610 x 1900	610 x 610 x 2350	610 x 610 x 2350	610 x 610 x 2350	1220 x 610 x 1600
Weight Approximate (kg)	525	591	662	728	802	868	934	1029
Installation Location	Rack-Mounted							
Storage Temperature (°C)	0~35							
Recommend Depth of Discharge	0.9							
Cycle Life	≥6000 (25±2°C, 0.5C / 0.5C, EOL70%)							
Warranty ^[3]	10 years							
Certification	UN38.3 / UL1973 / UL9540 / UL9540A							


1. DC Usable Energy, test conditions : 90%DOD, 0.3C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.
2. The current is affected by temperature and SOC.
3. The warranty is due whichever reached first of warranty period or life cycle power.

Model	BOS-A115	BOS-A120	BOS-A130	BOS-A135	BOS-A145	BOS-A150	BOS-A160
Main Parameters							
Cell Chemistry	LiFePO4						
Module Energy (kWh)	7.68						
Module Nominal Voltage (V)	38.4						
Module Capacity (Ah)	200						
Module Dimension (W × D × H, mm)	601.5 × 520 × 135						
Module Weight Approximate (kg)	70						
Battery Module Qty In Series (Optional)	15	16	17	18	19	20	21
System Nominal Voltage (V)	576	614.4	652.8	691.2	729.6	768	806.4
System Operating Voltage (V)	504~657	537.6~700.8	571.2~744.6	604.8~788.4	638.4~832.2	672~876	705.6~919.8
System Energy (kWh)	115.2	122.88	130.56	138.24	145.92	153.6	161.28
System Usable Energy (kWh) ^[1]	103.68	110.59	117.5	124.41	131.32	138.24	145.15
Max Continuous Discharge Rate(kW)	92.16	98.3	104.44	110.59	116.73	122.88	129.02
Charge/	Recommend						
Discharge Current(A) ^[2]	Max.						
				100			
				160			
Other Parameter							
Working Temperature (°C)	Charge : 0 ~ 55 / Discharge : -20 ~ 55						
Status Indicator	Yellow : Battery High Voltage Power On Red : Battery System Alarm						
Communication Port	CAN2.0						
Humidity	5% ~ 85%RH						
Altitude	≤3000m						
IP Rating of Enclosure	IP20						
Dimension (W × D × H, mm)	1220 × 610 × 1600	1220 × 610 × 1600	1220 × 610 × 1600	1220 × 610 × 1900	1220 × 610 × 1900	1220 × 610 × 1900	1220 × 610 × 1900
Weight Approximate (kg)	1095	1161	1227	1303	1369	1435	1501
Installation Location	Rack-Mounted						
Storage Temperature (°C)	0~35						
Recommend Depth of Discharge	0.9						
Cycle Life	≥6000 (25±2°C, 0.5C / 0.5C, EOL70%)						
Warranty ^[3]	10 years						
Certification	UN38.3 / UL1973 / UL9540 / UL9540A						

- DC Usable Energy, test conditions : 90%DOD, 0.3C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.
- The current is affected by temperature and SOC.
- The warranty is due whichever reached first of warranty period or life cycle power.

Small-Scale C&I Energy Storage Solution


Model		BOS-A-PDU-2
Operating Voltage		200~1000Vdc
Max.Charge/Discharge Current		160A
Operating Temperature		-20~65°C
Ingress Protection		IP20
DC Input Rating		12±2%V/4.15A
Details		572×632×142.2(W×D×H),21kg

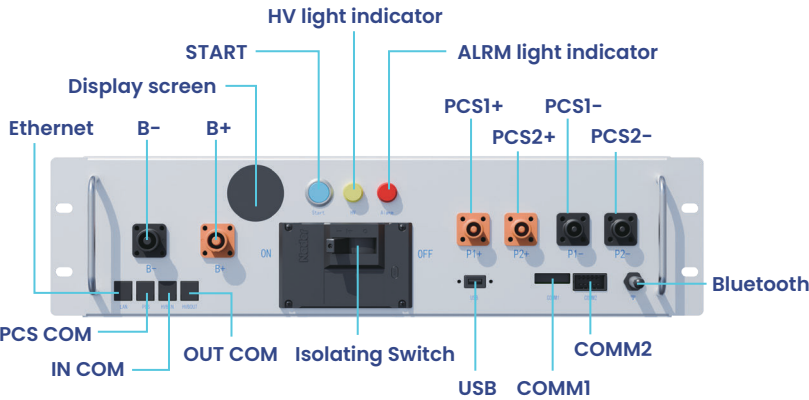

- ⊙ Ethernet:Features not yet developed.
- ⊙ PCS COM:PCS COM battery communication terminal: used to output battery information to the inverter.
- ⊙ IN COM:Connection position with previous BOS-A-PDU-4 communication input.
- ⊙ OUT COM:Connection position with next BOS-A-PDU-4 communication output.

- ⊙ Isolating Switch:It is used to manually control the connection between the battery rack and external devices.
- ⊙ USB:BMS upgrade port and storage expansion port.
- ⊙ COMM1:Connection position of external 12VDC power supply.
- ⊙ COMM2:Used for communication and providing power.
- ⊙ Bluetooth:The mobile APP connects to the data acquisition rod of the energy storage system.
- ⊙ B+:Battery common positive connection position (red).
- ⊙ B-:Battery common negative connection position (black).
- ⊙ Display screen:Display SOC and fault codes.
- ⊙ START:A start switch of 12VDC power inside the high-voltage control box.
- ⊙ HV light indicator:High-voltage hazard indicator (yellow).
- ⊙ ALRM light indicator:Battery system fault alarm indicator (red).
- ⊙ PCS1+:First PCS positive connection position (orange).
- ⊙ PCS2+:Second PCS positive terminal connection position (orange).
- ⊙ PCS1-:First PCS negative connection position (black).
- ⊙ PCS2-:Second PCS negative connection position (black).

Model		BOS-A-Pack7.68	
Nominal Capacity	200Ah	Ingress Protection	IP20
Nominal Energy	7.68kWh	Operating Temperature(Charge)	0~55°C
Nominal Voltage	38.4Vdc	Operating Temperature(Discharge)	-20~55°C
Nominal Charge/Discharge Current	160A	Storage Temperature	0~35°C
Details	576×632×135.2(W×D×H),66kg		

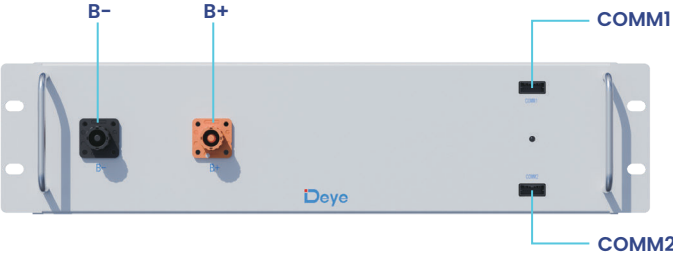

- ⊙ B-:Battery module negative pole (black).
- ⊙ B+:Battery module positive pole (orange).
- ⊙ COMM1:Used for communication and providing power.
- ⊙ COMM2:Used for communication and providing power.

Small-Scale C&I Energy Storage Solution

Model


BOS-A

BOS-A-Rack9 *2

Can install 16 pcs batteries and 1 pcs High Voltage Battery cluster control box.

Dimension (W × D × H)
Weight Approximate

1220 × 610 × 1600mm
84kg

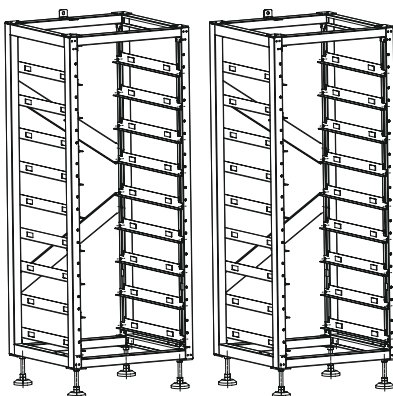


BOS-A-Rack11 BOS-A-Rack11 *2


Can install 10 pcs batteries and 1 pcs High Voltage Battery cluster control box.
Can install 21 pcs batteries and 1 pcs High Voltage Battery cluster control box.

Dimension (W × D × H)
Weight Approximate

610 × 610 × 1900mm
47kg

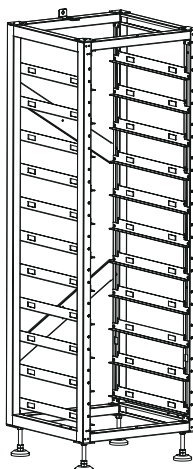

1220 × 610 × 1900mm
94kg

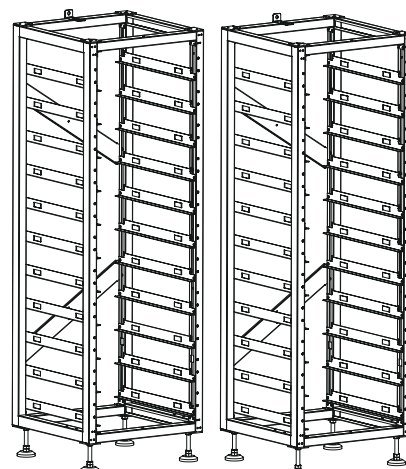


BOS-A-Rack14

Can install 13 pcs batteries and 1 pcs High Voltage Battery cluster control box.


Dimension (W × D × H)
Weight Approximate

610 × 610 × 2350mm
55kg

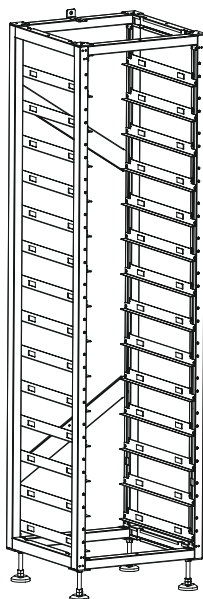


Small-Scale C&I Energy Storage Solution

Backup Power Duration Plan	1 hours		2 hours		4 hours	
Hybrid inverter power	100kW	50kW	80kW	50kW	80kW	
Battery model	BOS-A160	BOS-A100	BOS-A160	BOS-A100	BOS-A160	
Number of batteries	1 pc	1 pc	1 pc	2 pcs	2 pcs	

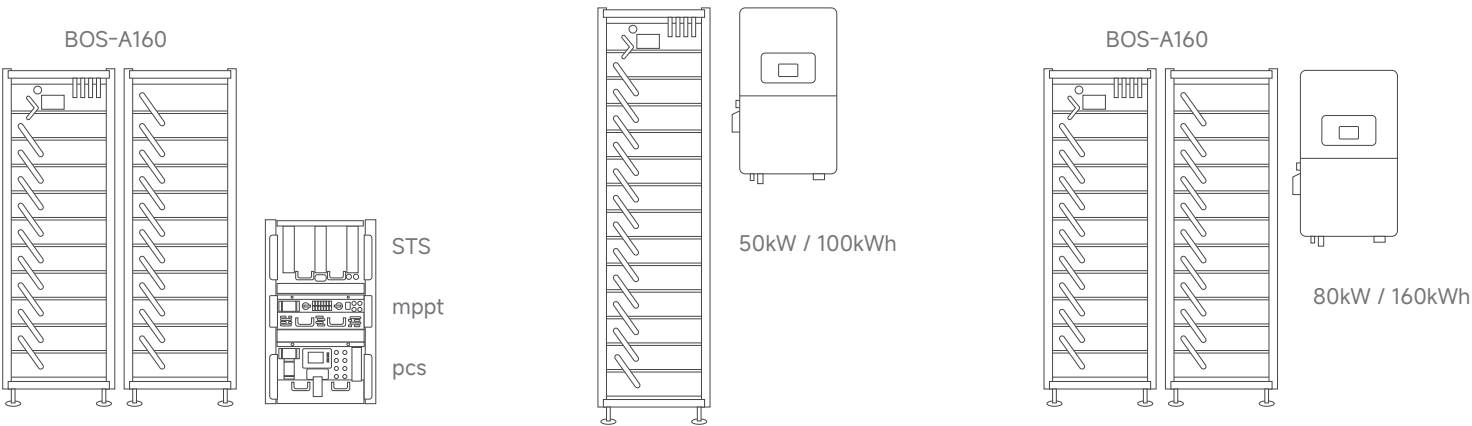

Typical Application Scenarios

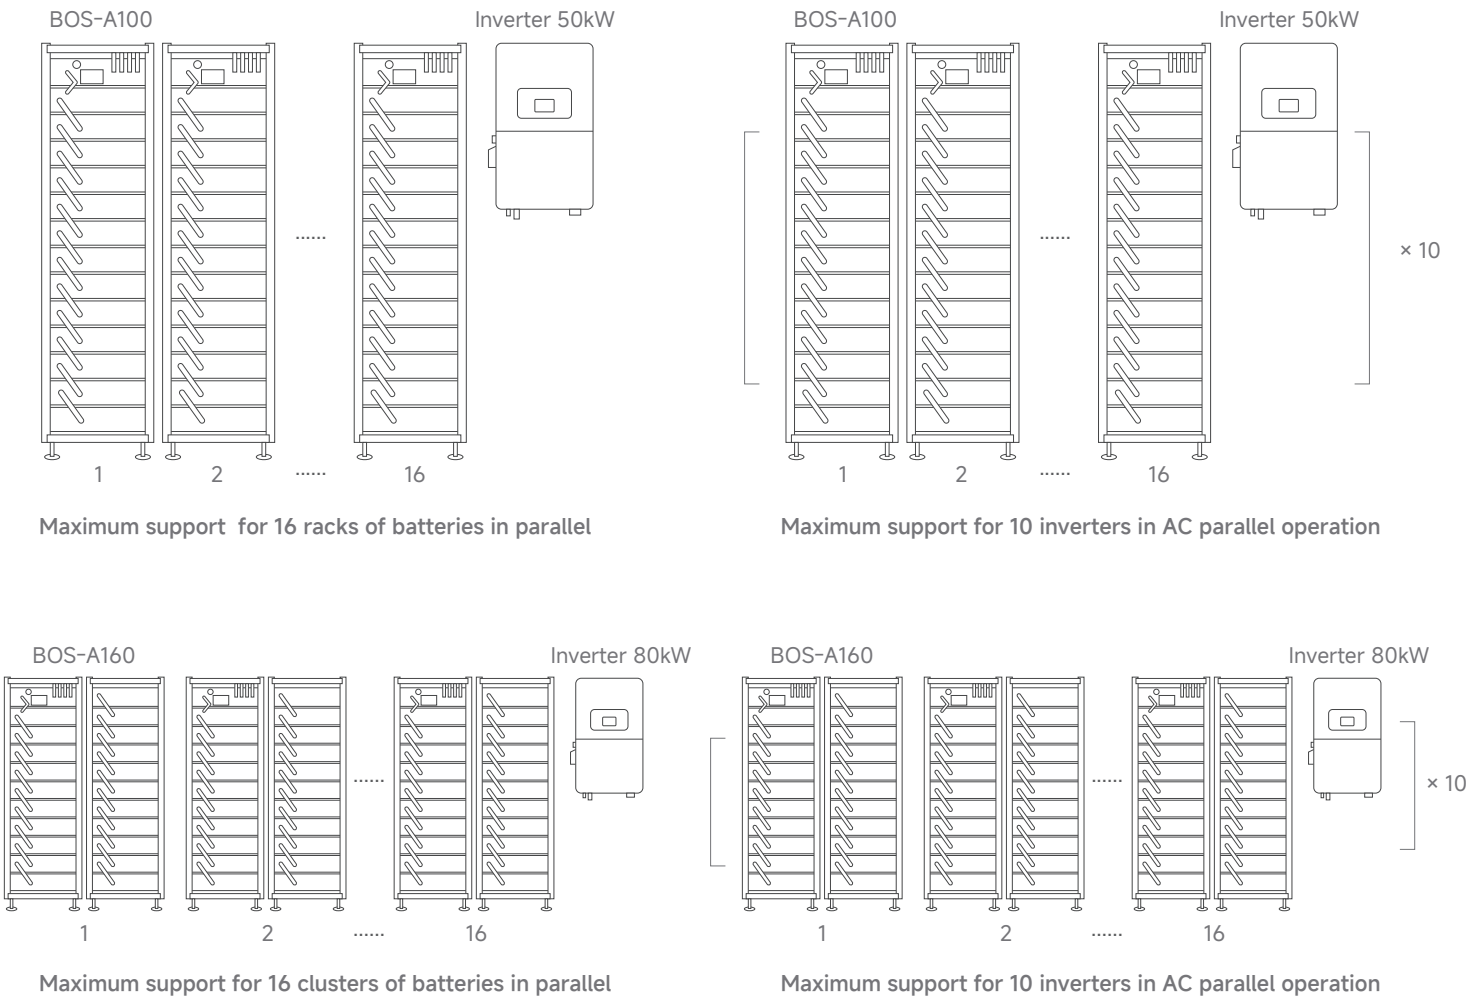


Deye Cloud


All-in-one Energy & Device Management Platform

- Unlock significant savings
- Individual Add-on for dynamic tariff
- Intelligent charging/discharging strategies
- Tailored solution to deye devices
- Real-time equipment monitoring
- Best energy scheduling solutions by Deye Copilot
- 24/7 AI Assistant support

Switch flexibly
between autonomous
and manual control

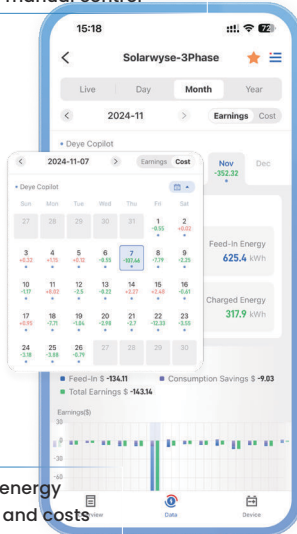

Display energy
savings and costs

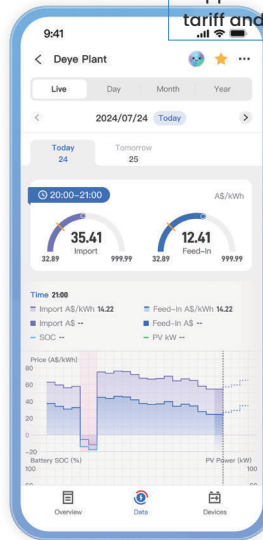

Support dynamic
tariff and flat-rate

AI Assistant



Offer response suggestions
and personalized support
experience

Support over 30
languages

Analyze dynamic pricing, predict power
load and PV generation to optimize energy
dispatch and minimize electricity costs



Deye Copilot
ToU



Smarten Up Your Energy Storage System

Download Deye Cloud APP to join us!

Embrace a seamless, effortless energy experience that's both eco-friendly and budget-friendly with our intelligent assistant



APP & Web

Manage your
energy effortlessly



Cloud-edge Collaboration

Faster and more
efficient



Accelerated Connection

Optimized for speed
and
performance



Localized Data Centers

Ensure data
sovereignty and
compliance in EU &
US



Deye Copilot

AI-powered energy
analysis and control



AI Assistant

24/7 support, fast,
efficient, in your
language

deye.shop

Поддержка на русском — deye.shop

Официальный дилер Deye в России — ООО «НТ»

Мы отвечаем на русском языке по любому оборудованию Deye из этого документа.

- Подберём инвертор и аккумуляторы под ваш дом или объект.
- Ответим на вопросы по монтажу, настройке и кодам ошибок.
- Поможем с гарантийным обращением.

Телефон [8 \(800\) 201-76-60](tel:8(800)201-76-60), звонок по России
бесплатный

Техническая поддержка support@deye.shop

Заказы и счета zakaz@deye.shop

Сайт deye.shop

На сайте — документы на русском, цены с НДС и наличие на складах в Ростове-на-Дону, Подмоскowie и Краснодаре. Работаем в будни с 9:00 до 18:00 по Москве.